


ITEM	PART	MATERIAL	QTY.
1	BELLOW	EPDM	1
2	THREADED UNION	CAST IRON, ZINC PLATED	2
3	PRESSURE RING	HARD STEEL WIRE	2

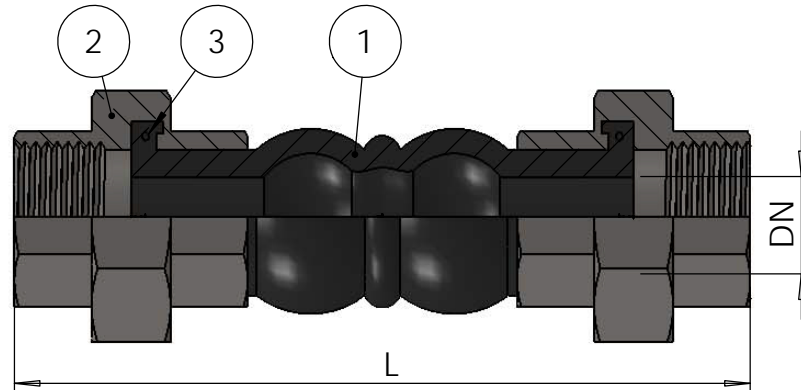

DESIGN CONDITIONS		
MEDIUM:	WATER, ACID, ALKALI, ETC.	
TEMPERATURE:	0°C to 80°C.	
PRESSURE:	DESIGN:	16 BAR
	TEST:	24 BAR

SIZE(in)	F/F(mm)	MOVEMENTS(mm)			ANGLAR DEG.	WEIGHT(kg)
		EXT.	COMP.	LET.		
1/2	200	5	22	22	45°	0.6
3/4	200	5	22	22	45°	0.8
1	200	5	22	22	45°	1.2
1 1/4	200	5	22	22	45°	1.35
1 1/2	200	5	22	22	45°	1.5
2	200	5	22	22	45°	2.6
2 1/2	265	8	24	24	45°	4
3	280	8	24	24	45°	5.5

MANUFACTURER TOLERANCES FOR THE RUBBER ACCORDING TO FSA-TECHNICAL HANDBOOK										
DN	ΦID (mm)	ΦD (mm)	ΦSK (mm)	b (mm)	ΦC (mm)	L (mm)				PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CO., LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CO., LTD IS PROHIBITED.
						0 to 150	175 to 300	300 to 450	≥500	
0 to 250	±5	±6	±5	±1	±2	±5	±5	±5	+5 -6	
300 to 550	±6	±10	±6	±1	±2	±5	±5	±5	+5 -6	
600 to 1150	±10	±12	±8	±1	±2	±5	±5	+5 -6	±6	
1200 to 1750	+10 -12	+19 -12	±10	±1	±2	±6	±10	±10	±10	
≥1800	+10 -16	+25 -19	±12	±1	±2	±6	±10	±10	±10	

		DIMENSIONS ARE IN MILLIMETERS	NAME	DATE	RUBBER EXPANSION JOINT		
		TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN	Yin Jianmin			
			CHECKED	Li Songhui			
			ENG APPR.	Li Tongwen			
			MFG APPR.	GYLDT			
			QTY.				
		MATERIAL: CAST IRON/EPDM	SIGNED BY:		SIZE A	DWG. NO. 01	REV. 01
NEXT ASSY	USED ON	APPLICATION	DO NOT SCALE DRAWING		SCALE:	WEIGHT:	SHEET OF